

Orion Energy Systems

OT Office Troffer Fixture Series

Orion's patented lighting systems incorporate superior optical and thermal efficiency to deliver the most output with the least input.


APPLICATIONS Office and other low bay environments with T-bar ceilings less than 15 ft. Fits 2' by 2' and 2' by 4' ceiling grids.

ELECTRICAL Hardwire power connection. Normal output ballast standard.

FINISH White finish. Hinged door with lens included in kit.

CERTIFICATION UL Listed for Damp Locations.

CONSTRUCTION Durable steel frame. Linear fluorescent lamps sold separately in case quantities. U-tube fluorescent lamps included and installed in fixtures. No reflectors included. Multiple lens options available. >90% fixture efficiency.

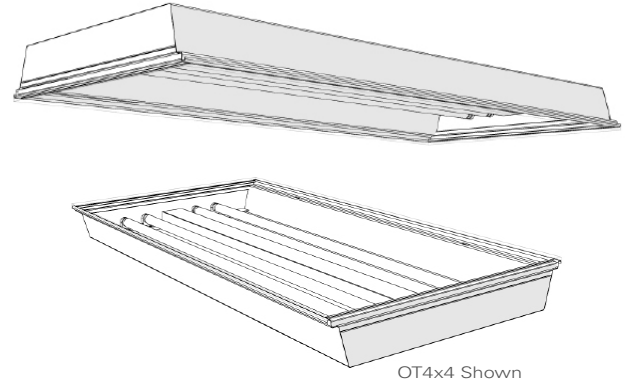

OT4x4 Shown

SPECIFICATIONS

Series	Lamps	Wattage Consumed		Length	Width	Depth
		@120v	@277v			
OT2X2-U	2 Lamp (U-tube)	48@120v	48@277v	24.0"	23.75"	4.0"
OT2x2-UNV-IS	2 Lamp T8	27@120v	27@277v	24.0"	23.75"	4.0"
OT4x2-UNV-IS	2 Lamp T8	56@120v	56@277v	47.75"	23.75"	4.0"
OT4x3-UNV-IS	3 Lamp T8	84@120v	84@277v	47.75"	23.75"	4.0"
OT4x4-UNV-IS	4 Lamp T8	111@120v	111@277v	47.75"	23.75"	4.0"

ORDERING INFORMATION

OT	XX	XX	XX	XX	XX	XX	XX
Series	Length & Lamps	Lamp Type	Ballast Type	Ballast Output	U-Tube Lamp Options	Kit	Lens

<table border="1"> <tr><th>Series</th></tr> <tr><td>OT Office Troffer Fixture</td></tr> </table>	Series	OT Office Troffer Fixture	<table border="1"> <tr><th>Lamp Type</th></tr> <tr><td>UNV Linear Lamps</td></tr> <tr><td>U U-tube Lamps (2X2 Fixtures only)</td></tr> </table>	Lamp Type	UNV Linear Lamps	U U-tube Lamps (2X2 Fixtures only)	<table border="1"> <tr><th>Ballast Output</th></tr> <tr><td>(blank) High Output</td></tr> <tr><td>N Normal Output</td></tr> <tr><td>LP Low Output</td></tr> </table>	Ballast Output	(blank) High Output	N Normal Output	LP Low Output	<table border="1"> <tr><th>U-Tube Lamp Options</th></tr> <tr><td>850 850 U-tube Lamp</td></tr> <tr><td>841 841 U-tube Lamp</td></tr> <tr><td>835 835 U-tube Lamp</td></tr> <tr><td>(blank) Leave blank if ordering a fixture with linear lamps</td></tr> </table>	U-Tube Lamp Options	850 850 U-tube Lamp	841 841 U-tube Lamp	835 835 U-tube Lamp	(blank) Leave blank if ordering a fixture with linear lamps	<table border="1"> <tr><th>Lens*</th></tr> <tr><td>(blank) Clear Acrylic</td></tr> <tr><td>CI Cracked Ice Acrylic</td></tr> <tr><td>PML Prismatic Acrylic</td></tr> <tr><td>PCL Clear Polycarbonate</td></tr> <tr><td>PL5 Parabolic (3/4" spacing)</td></tr> </table>	Lens*	(blank) Clear Acrylic	CI Cracked Ice Acrylic	PML Prismatic Acrylic	PCL Clear Polycarbonate	PL5 Parabolic (3/4" spacing)
Series																								
OT Office Troffer Fixture																								
Lamp Type																								
UNV Linear Lamps																								
U U-tube Lamps (2X2 Fixtures only)																								
Ballast Output																								
(blank) High Output																								
N Normal Output																								
LP Low Output																								
U-Tube Lamp Options																								
850 850 U-tube Lamp																								
841 841 U-tube Lamp																								
835 835 U-tube Lamp																								
(blank) Leave blank if ordering a fixture with linear lamps																								
Lens*																								
(blank) Clear Acrylic																								
CI Cracked Ice Acrylic																								
PML Prismatic Acrylic																								
PCL Clear Polycarbonate																								
PL5 Parabolic (3/4" spacing)																								
<table border="1"> <tr><th>Length & Lamps</th></tr> <tr><td>2X2 2 Foot, 2-Lamp T8</td></tr> <tr><td>4X2 4 Foot, 2-Lamp T8</td></tr> <tr><td>4X3 4 Foot, 3-Lamp T8</td></tr> <tr><td>4X4 4 Foot, 4-Lamp T8</td></tr> </table>	Length & Lamps	2X2 2 Foot, 2-Lamp T8	4X2 4 Foot, 2-Lamp T8	4X3 4 Foot, 3-Lamp T8	4X4 4 Foot, 4-Lamp T8	<table border="1"> <tr><th>Ballast Type</th></tr> <tr><td>(blank) Instant Start</td></tr> <tr><td>PS Program Start</td></tr> <tr><td>PI 1 Program Start, 1 Instant Start</td></tr> <tr><td>347 347v Ballast</td></tr> </table>	Ballast Type	(blank) Instant Start	PS Program Start	PI 1 Program Start, 1 Instant Start	347 347v Ballast	<table border="1"> <tr><th>Kit</th></tr> <tr><td>K Kit, Includes Assembled Frame with Lens</td></tr> </table>	Kit	K Kit, Includes Assembled Frame with Lens	<p>*A deep parabolic lens (with 8" spacing) is also available. It includes an adapter frame that increases the height of the fixture by 3". Consult factory for more information.</p>									
Length & Lamps																								
2X2 2 Foot, 2-Lamp T8																								
4X2 4 Foot, 2-Lamp T8																								
4X3 4 Foot, 3-Lamp T8																								
4X4 4 Foot, 4-Lamp T8																								
Ballast Type																								
(blank) Instant Start																								
PS Program Start																								
PI 1 Program Start, 1 Instant Start																								
347 347v Ballast																								
Kit																								
K Kit, Includes Assembled Frame with Lens																								



877.204.7540

www.oesx.com

NYSE Amex: OESX

© 2011 Orion Energy Systems, Inc. All rights reserved. Light Years Ahead and Orion are trademarks/service marks of Orion Energy Systems Inc. Design modification rights reserved. Orion fixtures are covered by a one-year limited warranty. Accessories and individual components are covered by separate OEM supplier warranties.



02 / 06 / 2011